


ROTARY VANE - LUBRICATED DUPLEX "SPACE SAVER" VACUUM SYSTEM (1.0 HP - 10.0 HP)

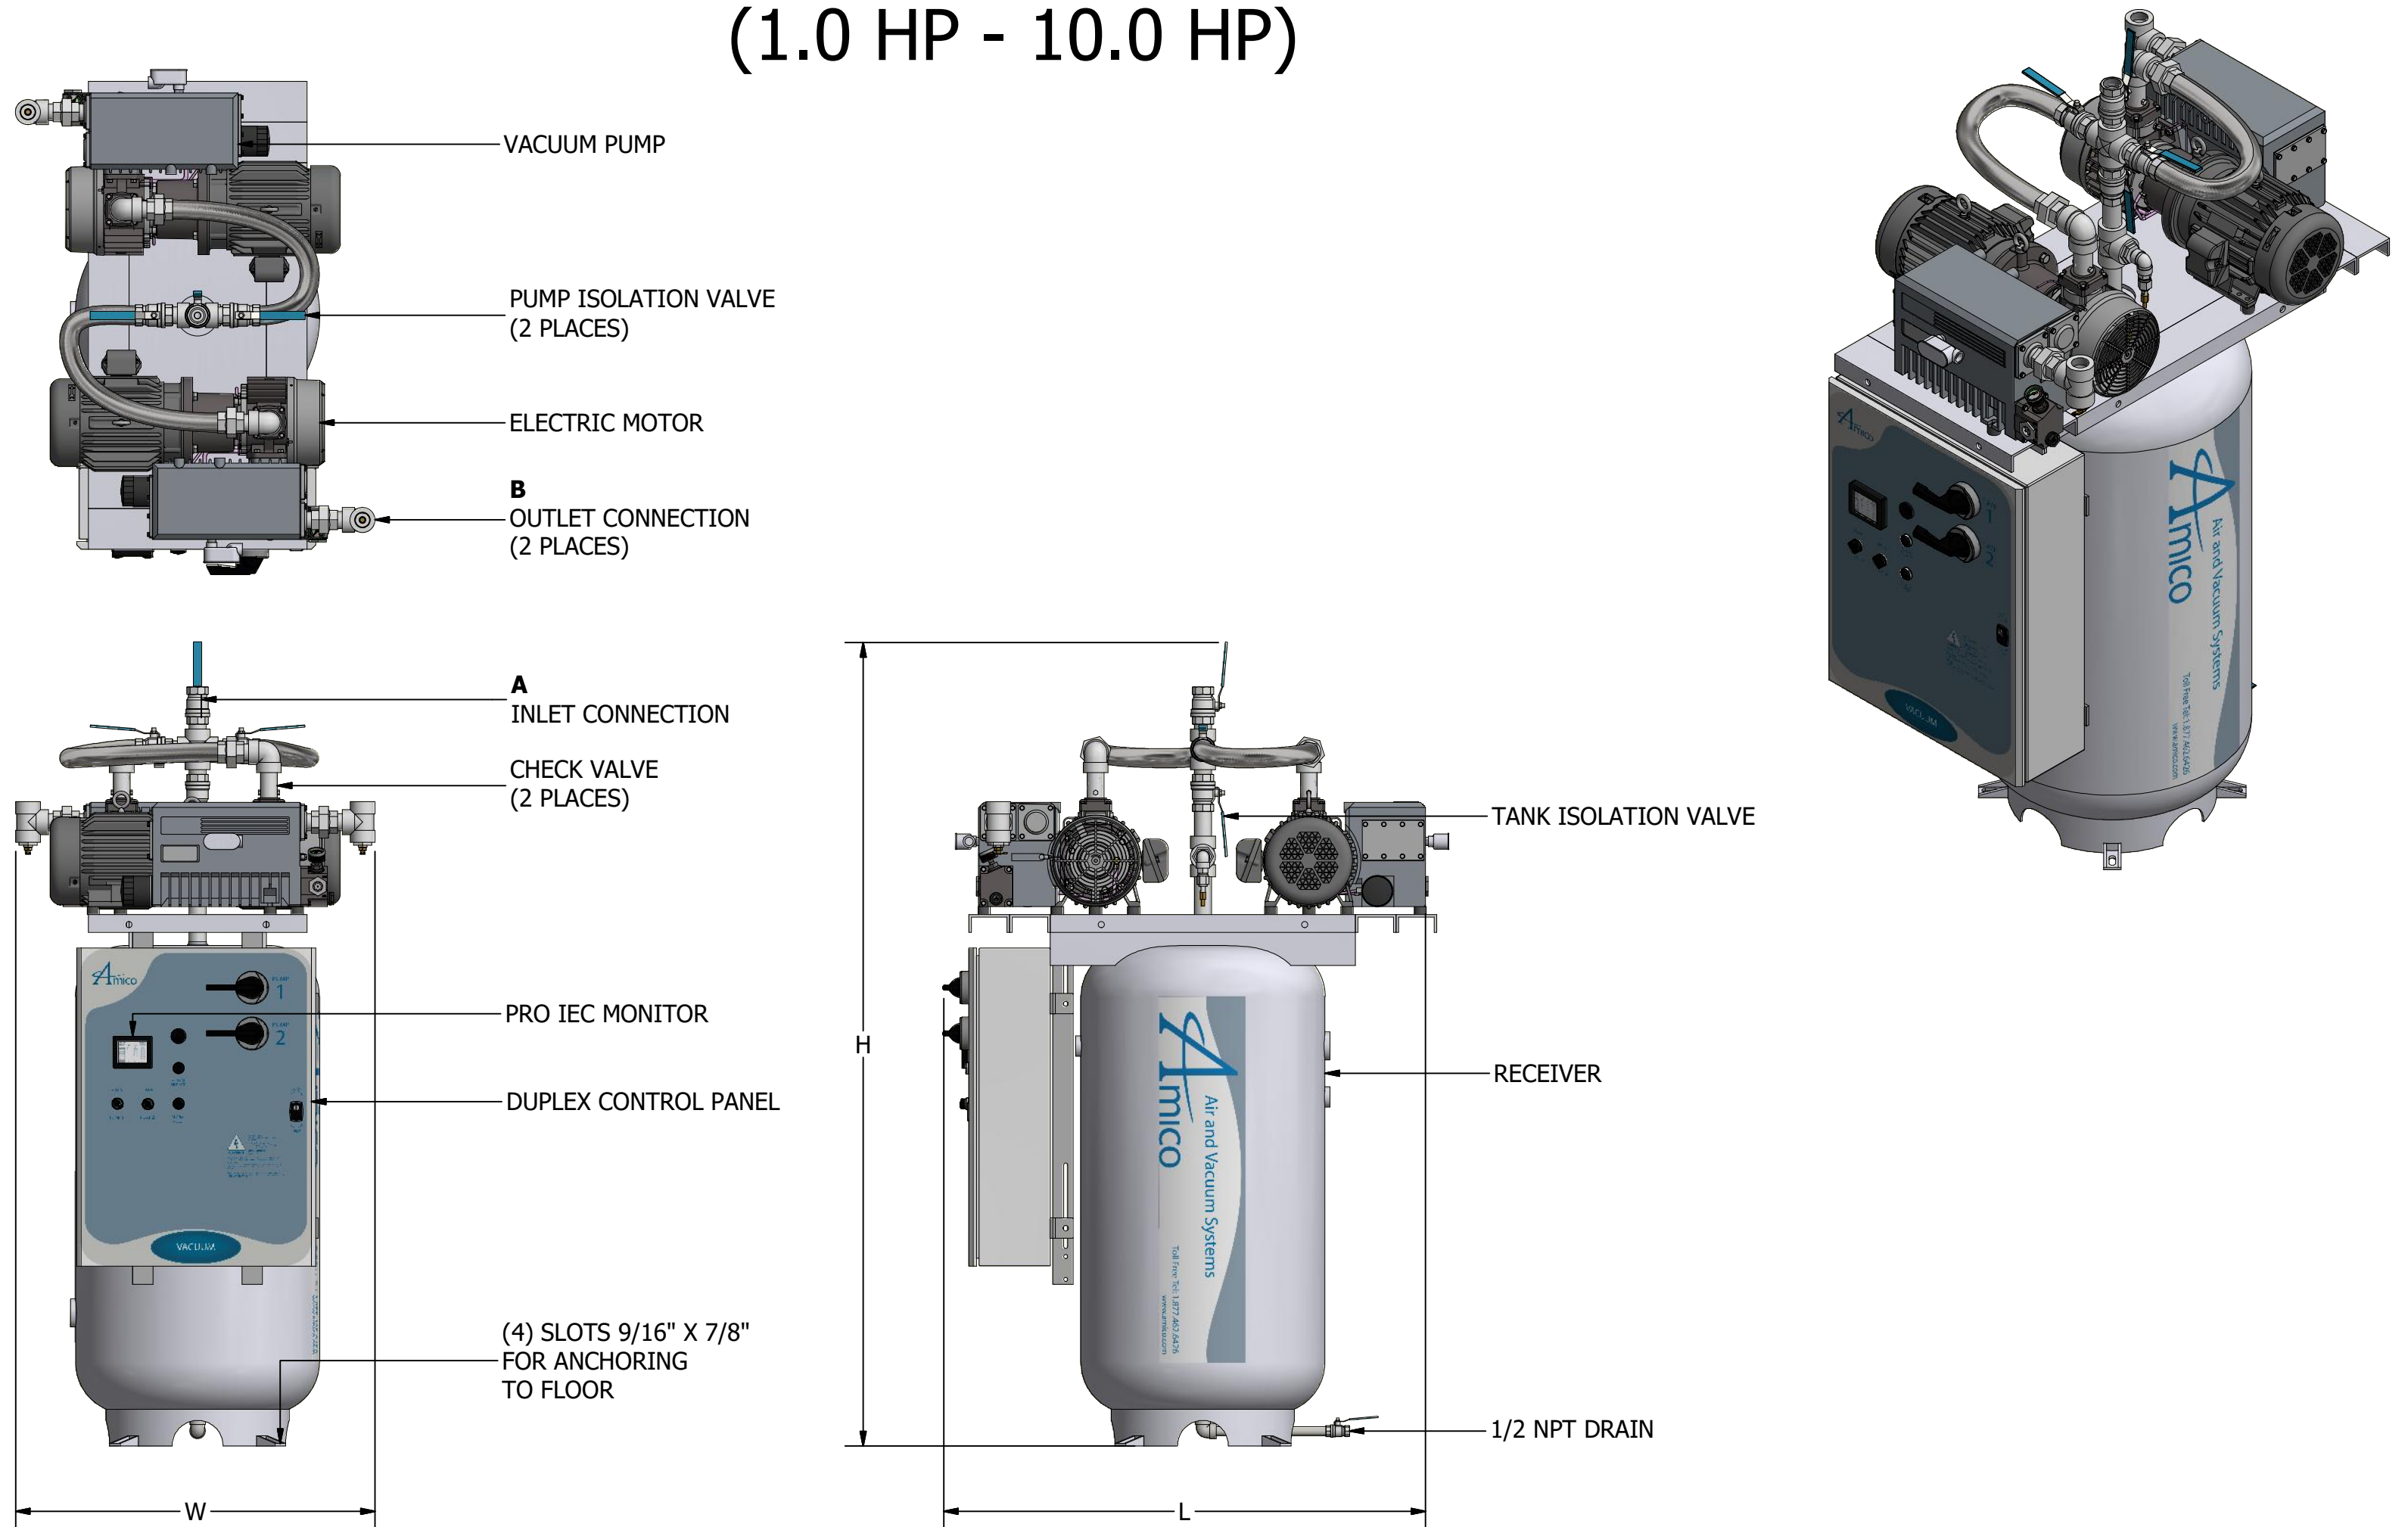

DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE

MODEL	HP (kW)	A INLET NPT	B OUTLET NPT	TANK SIZE GALLON (LITRE)	PUMP SCFM @ 19" HG (LPM)		NFPA SYSTEM CAPACITIES WITH ONE COMPRESSOR ON STANDBY @ 19" HG (LPM)		WEIGHT IN LBS (KG)	SQ. FT. REQUIRED (M ²)	SYSTEM FLA (WITH ALL PUMPS RUNNING)				SYSTEM BTU/HR	SOUND LEVEL dB (A)	W (M)	L (M)	H (M)
					50 Hz Motor	60 Hz Motor	50 Hz Motor	60 Hz Motor			208V	230V	380V**	460V					
											208V	230V	380V**	460V					
V-RVL-D-080P-TS-N-010*	1 (0.75)	0.75	0.75	80 (303)	4.0 (113)	4.8 (136)	4.0 (113)	4.8 (136)	695 (315)	8.8 (0.82)	-	11	6	6	2,544	66	28 (0.71)	45 (1.14)	75 (1.91)
V-RVL-D-080P-TS-N-015*	1.5 (1.12)	1.25	1.25	80 (303)	5.8 (164)	7.0 (198)	5.8 (164)	7.0 (198)	819 (371)	11.4 (1.06)	16	14	7	7	3,817	63	35 (0.89)	47 (1.19)	82 (2.08)
V-RVL-D-080P-TS-N-020*	2 (1.49)	1.25	1.25	80 (303)	9.2 (261)	11.0 (311)	9.2 (261)	11.0 (311)	847 (384)	11.4 (1.06)	18	16	8	8	5,089	66	35 (0.89)	47 (1.19)	82 (2.08)
V-RVL-D-080P-TS-N-030	3 (2.24)	1.25	1.25	80 (303)	14.2 (402)	17.0 (481)	14.2 (402)	17.0 (481)	951 (431)	13.9 (1.29)	25	22	11	11	7,633	66	40 (1.02)	50 (1.27)	82 (2.08)
V-RVL-D-120P-TS-N-050*	5 (3.73)	1.25	1.25	120 (454)	21.7 (614)	26.0 (736)	21.7 (614)	26.0 (736)	1175 (533)	15.7 (1.46)	39	34	16	17	12,722	68	41 (1.04)	55 (1.40)	89 (2.26)
V-RVL-D-120P-TS-N-052*	5 (3.73)	2.0	2.0	120 (454)	30.8 (872)	37.0 (1048)	30.8 (872)	37.0 (1048)	1503 (682)	27.5 (2.55)	41	36	20	18	12,722	72	60 (1.52)	66 (1.68)	89 (2.26)
V-RVL-D-120P-TS-N-075*	7.5 (5.59)	2.0	2.0	120 (454)	43.3 (1226)	52.0 (1472)	43.3 (1226)	52.0 (1472)	1649 (748)	27.5 (2.55)	58	54	28	27	19,083	74	60 (1.52)	66 (1.68)	89 (2.26)
V-RVL-D-120P-TS-N-100*	10 (7.46)	2.0	2.0	120 (454)	54.2 (1535)	65.0 (1841)	54.2 (1535)	65.0 (1841)	1699 (771)	27.5 (2.55)	81	64	29	32	25,444	74	60 (1.52)	66 (1.68)	89 (2.26)
V-RVL-D-120P-TS-N-101*	10 (7.46)	2.0	2.0	120 (454)	64.2 (1818)	77.0 (2180)	64.2 (1818)	77.0 (2180)	1929 (875)	27.5 (2.55)	89	73	29	37	25,444	76	60 (1.52)	66 (1.68)	89 (2.26)

*SYSTEM CONFIGURATION DIFFERS FROM MODEL SHOWN

**380 VOLT DATA PROVIDED AT 50HZ
ALL OTHER VOLTAGES ARE RATED AT 60HZ

ADDITIONAL MODELS AVAILABLE UPON REQUEST



85 Fulton Way, Richmond Hill
Ontario, L4B 2N4 Canada
71 East Industry Court
Deer Park, NY 11729
Direct Tel: 905.764.0800
Tel: 1.877.462.6426
Fax: 1.866.440.4986