


AUTOMATIC VERTICAL FORM-FILL-SEALING MACHINE WITH AUGER FILLER FOR FREE FLOW AND NONFREE FLOW POWDER PRODUCT

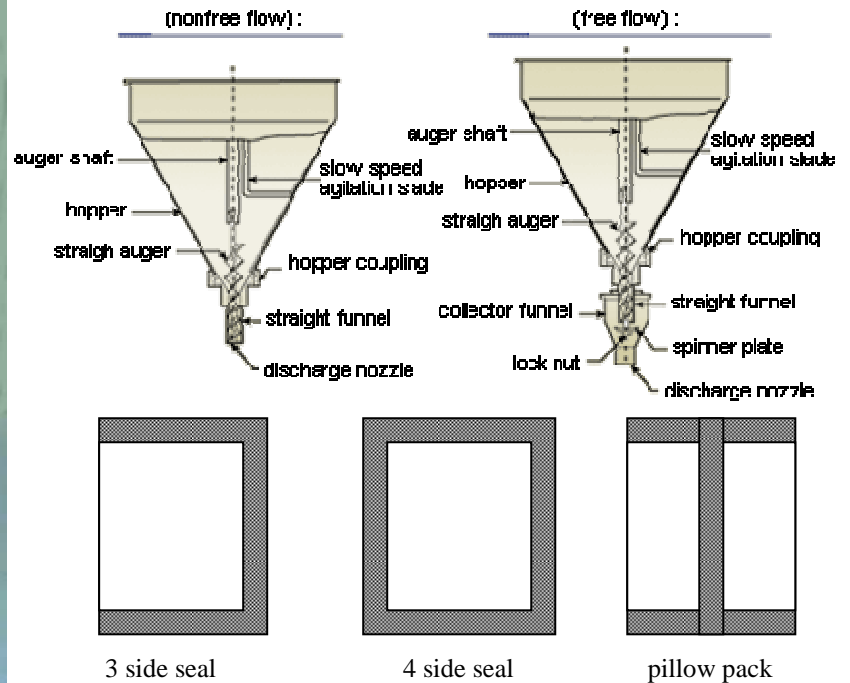

Flour, Herbal powder, Grain powder, Yeast, Stevia, Sugar, Season powder, Coffee, Flavor, Essence, Milk, Instant tea powder ...

Model	CP-1A	CP-1BA	CP-11A	CP-11BA	CP-111	CP-111BA
Pack style	3-side seal	3-side seal	Pillow type	Pillow type	4-side seal	4-side seal
Packing dimension	W 1.58"- 3.25" L 1.76" - 4.75"	W 2"- 5 1/2" L 3"- 8"	W 1.18" - 3 1/8" L 2" - 4 3/4"	W 1.18"-5.12" L 3"- 8"	W 1.58"- 3.25" L 1.76" - 4.75"	W 2"- 5 1/2" L 3"- 8"
Packing speed	30 -120Bags/min	20 -70Bags/min	30 -120Bags/min	20 - 70Bags/min	30 -120Bags/min	20 -70Bags/min
Max. film dimension	Ø12" W 11" Thickness 3 mil.	Ø12" W 11" Thickness 3 mil.	Ø12" W 11" Thickness 3 mil.	Ø12" W 11" Thickness 3 mil.	W 1.58"- 3.25" L 1.76" - 4.75"	W 2"- 5 1/2" L 3"- 7"
Power supply	220V, 60Hz, 8Kw single phase	220V, 60Hz, 9Kw single phase	220V, 60Hz, 8Kw single phase	220V, 60Hz, 9Kw single phase	220V, 60Hz, 8Kw single phase	220V, 60Hz, 9Kw single phase
Machine weight	800 Lb	920 Lb	800 Lb	920 Lb	800 Lb	920 Lb
Machine dim.	W 20"x L 30"x H 92"	W 26"x L 36" x 100"	W 20"x L 30"x H 92"	W 26"x L 36" x 100"	W 20"x L 30" x 92"	W 26"x L 36" x 100"

Features:

- Stepping motor controlled auger filler. Easy to operator and high accuracy.
- Automatic feeding system with liner vibrator.
- Forward and reverse direction photo registration system.
- Sealing temperature controlled by PID temperature controller.
- Easy use central lubrication injection system.
- Sealing jaw support by strong & long life bearing system.