

### Energy Efficient, Low Temperature Merchandiser

Style	Mid Size
Standard Cabinet Color	Black
Gross Capacity (cubic feet)	12.0
Gross Capacity (liters)	340
Temperature Range °F	0 to -20
Temperature Range °C	-18 to -29
Height (inches / cm)	62.25 / 158.1
Width (inches / cm)	26.5 / 67.3
Depth less handle (inches / cm)	27.5 / 69.8
Interior LED Light Strips	2
LED Translight Display	22.7" x 5.4"
Adjustable Shelves	3
Bottom Shelf	1
Casters	Yes
Volts / Hz / Phase	115 / 60 / 1
Amps	4.5
H.P. ( kW )	1/2 ( 0.37 )
Refrigerant	R290
Net Weight (lbs)	245
Net Weight (kg)	111.1
NEMA Configuration	5-15P



### GREAT FEATURES, OUTSTANDING VALUE



Brilliant, energy efficient LED lighting creates an impressive visual impact. Standard on all models.



LED backlit translight display provides branding opportunities to promote and increase sales potential.



Low temperature system range from as low as -20°F up to 0°F. The set-point temperature can be factory set to suit your product storage needs.



Maintenance free condenser\* helps maintain the freezer's performance while eliminating the need for costly, regular cleaning.



Energy free triple pane glass door for added insulation value. Anti-fog feature helps keep products in clear view.



Programmable Electronic Control Center provides "real time" information with audible and visual alarms. Standard on all models.

### ENERGY EFFICIENT PERFORMANCE

- Eco-friendly, efficient, self contained R290 refrigeration system delivers setpoint temperatures from 0°F to -20°F depending on your requirements.
- Frost free, forced air system for quick, even freezing with user defined or temperature sensed defrost cycles.
- External front mounted electronic microprocessor controller for precise, efficient temperature management. Features continuous digital temperature display, adjustable temperature setpoint, audible and visual temperature alarm, audible and visual door open alarm.
- Maintenance free condenser\* improves efficiency and eliminates cleaning costs.
- Bottom mount condensing unit provides elevated merchandising visibility keeping products within easy reach.
- High efficiency fan motors reduce energy consumption and maintain optimum air circulation for consistent cabinet temperature.

### DURABLE CABINET CONSTRUCTION

- Tough, exterior finish provides long lasting durability to help keep the product looking like new even after years of service.
- 2½" thick walls with high density, foamed in place closed cell insulation for temperature and energy efficiency.
- Bright white galvanized interior walls with baked on finish for a clean look that supports product illumination and provides the perfect backdrop.
- Stainless steel, rounded corner interior bottom for easy cleaning.
- Spacious condenser housing provides superior heat dispersion and air circulation.
- Rounded interior corners for easy cleaning.
- Low profile casters and front levelling legs for easy installation.

### CLEAR VIEW GLASS DOOR

- Energy free triple pane, Low-E coated, insulated safety glass door helps keep the cold inside.
- Anti-fog feature quickly eliminates fog on glass after door opening/closing in high ambient conditions.
- Snap-in, one piece, self sealing door gasket makes cleaning trouble-free.
- Self closing torsion bar door helps prevent the door from being left open. The torsion bar system is more durable, reliable and rust resistant than spring loaded systems.
- Ergonomic 18" satin crescent handle.


### BRILLIANT CABINET LIGHTING

- Cabinet interior features two (2) full height, high intensity, energy efficient white LED light strips to showcase merchandise and eliminate bulb replacement.
- Captivating LED backlit translight display features two (2) full width white LED light strips.

### STURDY CABINET SHELVING

- Three (3) coated adjustable shelves resist rust and can be adjusted in 1/2" increments.
- One (1) coated bottom shelf.

### ELECTRICAL REQUIREMENTS


- Unit includes cord and plug.
- Dedicated 15 amp grounded 115V 60Hz single phase circuit.
- NEMA 5-15P three prong 15 amp receptacle. 

### WARRANTY & CUSTOMER CARE


- One (1) year parts and labor. Additional four (4) years on compressor.
- 24/7 Customer Care support and a network of certified licensed technicians to respond to any refrigeration issue.

### PRODUCT DIMENSIONS

#### FRONT VIEW

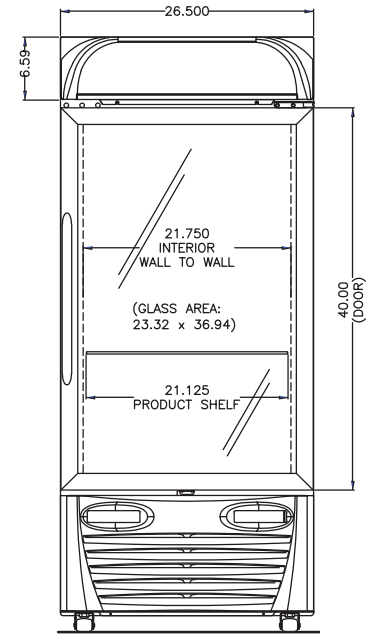

#### SIDE VIEW

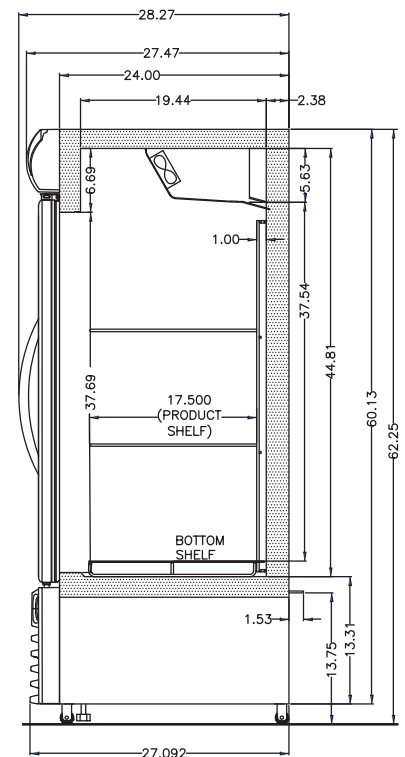


### ACCESSORIES FOR BRANDING, PROMOTION, CUSTOMIZING PACKOUT



Custom Graphics



Wire Baskets with Dividers



Menu / Price Strips,  
Additional Wire Shelves



Security Lock Kit

\*Regular cleaning and maintenance not required under normal operating conditions. Some exceptions may apply. Contact Minus Forty for more information.

Warranty is a limited warranty, please refer to detailed warranty outline available from our Customer Care Department. Self cleaning maintenance free condenser not tested in all environments, some extreme installations may require periodic inspection and/or cleaning. Specifications are subject to change without notice. Weights and dimensions do not include packaging or shipping materials.

All Minus Forty® freezers are energy efficiency certified to USA DOE standards for both Ice Cream and Commercial Freezer classes. Models 43-UDGF, 44-UDGF are certified to Commercial Freezer class.



Certified to Energy Standards:  
U.S. Department of Energy (DOE)  
California Energy Commission.  
Natural Resources Canada (Nrcan)

Minus Forty Technologies Corp., 30 Armstrong Ave. Georgetown, Ontario Canada L7G 4R9

TEL 800.800.5706 • 905.702.1441 • FAX 905.702.1442 • www.MINUSFORTY.com

© Minus Forty® Technologies Corp. All Rights Reserved. Minus Forty® is a registered trademark of Minus Forty Technologies Corp.