

PARTA U

TYPE		WEIGHT RANGE	CAPACITY FIXED / VARIABLE	
2001		300 - 2800 gr	925 or 1050	450-1032 or 616-1408 pcs/h.
2002		110 - 1250 gr	1850 or 2100	900-2064 or 1232-2816 pcs/h.
2012		300 - 2800 gr	925 or 1050	450-1032 or 900-2064 pcs/h.
		110 - 1250 gr	1850 or 2100	616-1408 or 1232-2816 pcs/h.
2003		110 - 660 gr	2775 or 3150	1350-3096 or 1848-4226 pcs/h.
DIMENSIONS		WEIGHT	CONNECTED LOAD	
Length	2470 mm	nett 620 kg	230/400 V, 50 Hz + earth	
Width	1082 mm	gross 820 kg	1,6 KVA	
Height	1612 mm	Shipping volume 1,6 m³		

OPTIONS

- Discharge roller with scraper for dough weight below 200 gr
- Hinged dough hopper, with safety ring. Capacity 170 ltr.
- Hinged dough hopper, without safety ring. Capacity 210 ltr.
- Hinged dough hopper, without safety ring. Capacity 245 ltr.
- Conveyor left or right
- Conveyor length 725, 925, 1275 mm
- Conveyor material synthetic or felt
- Hopper inside Teflon coated
- Oil shortage signalisation
- Beka oil pump 8 P
- Oiling on hopper
- Belt oiling
- Position stop for easy cleaning
- Digital capacity display
- Variable capacity by means of frequency inverter with digital display
- Two mechanical flour dusters
- Mechanical pieces counter
- Height machine increased by 100 mm
- Customer specific Blue Box

WP BAKERY GROUP USA
2 Trap Falls Road, Suite 105, Shelton, CT 06484 // Phone 203-929-6530 // Fax 203-929-7089 // info@www.wpbakerygroupusa.com // www.wpbakerygroupusa.com



PARTA U
Dough Divider

PARTA U

Picture Parta U

EXTREMELY ACCURATE, UNIVERSAL MACHINE WITH A PROVEN LONG LIFE TIME THAT CAN BE USED FOR NEARLY ANY TYPE OF DOUGH IN NEARLY EVERY TYPE OF BAKERY.



BENEFITS

- Suitable for all kinds of dough types
- Gentle dough treatment
- Wide weight range: 110-2800 gr (type 2001)
- Maximum adaption to batch sizes with various different hopper sizes
- Easy and quick cleaning of hopper and all parts coming in contact with dough
- User friendly
- Round hopper neck
- Dough pieces are transported sideways
- Modern design
- Maximum adaption to individual wishes
- Adjustable spring pressure
- Low machine height with max. accessibility and hopper size 120 ltr.
- Sideways hinged hopper
- Self-cleaning knife

BASIC EXECUTION:

- Number of pockets: 1 - 2 - 1 and 2 - 3
- Side discharge conveyor / front discharge conveyor on request
- Side-discharge conveyor, length 725 mm (Parta U 2001) and 1275 mm (Parta U 2002, U 2012 + U 2003) outside the machine, left or right hand
- Cover plates in stainless steel
- Dividing unit in Ni-Resist
- Measuring pistons Ni-Resist
- Hinged hopper in stainless steel, with safety ring, contents 120 ltr.
- Automatic lubrication system with oiling. With 6 fixed dosing valves.
- Fixed capacity 925 pcs/h. (Parta U 2001), 1850 pcs/h. (Parta U 2002 + U 2012) and 2775 pcs/h. (Parta U 2003). Other fixed capacities on request.
- Operation: on / off / emergency
- Knife hardened steel
- Knife cleaning device
- Crankshaft and drive rods cast iron nickel plated
- Analogue weight indication

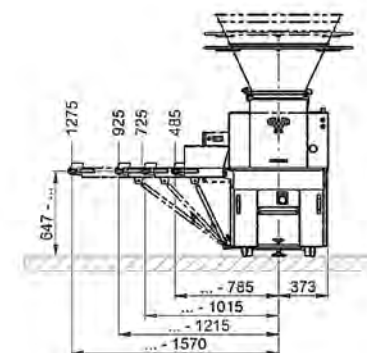
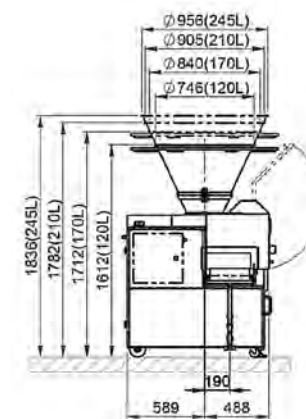

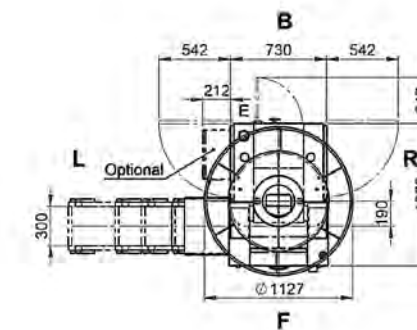


Illustration Parta U with discharge conveyor