




L&C

LABELING & CODING

## EZ-SRB CONVECTION HEAT SHRINK TUNNELS

### Configurable convection heat tunnels for consistent, high quality sleeve and tamper band shrinking

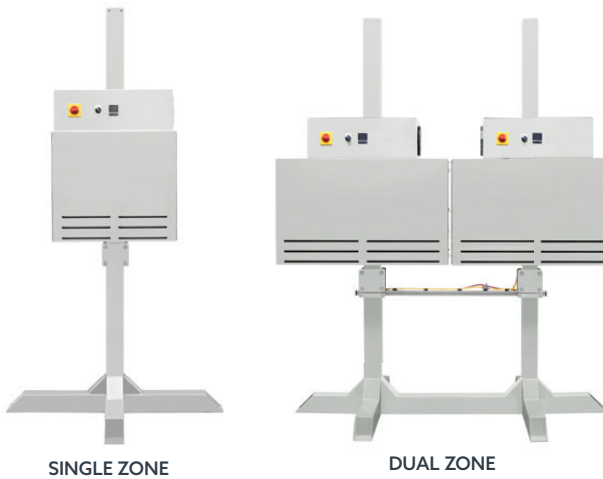

EZ-SRB shrink tunnels are the convective heat models in Axon's complete line of shrink sleeve tunnels. EZ-SRB tunnel modules are offered in 24" and 36" versions. Each module is a separate shrink zone and two or more modules are configured together to accommodate required speeds and shrink performance.

EZ-SRB tunnels are ideal for facilities that do not have steam generation capabilities. Their recirculating, digitally controlled convection heating system provides consistent, evenly distributed heat capable of delivering required shrink results. A single EZ-SRB tunnel can accommodate a range of applications and production speeds. For applications with high shrink requirements, high speeds, or challenging container geometries, dual or custom tunnel configurations will deliver the required performance.

#### FEATURES AND BENEFITS

#### SHRINK APPLICATIONS

Like every Axon shrink tunnel, EZ-SRB offers the flexibility to perform multiple shrink applications. This flexibility makes Axon tunnels one of the best values in the industry.

- **Proven performance and durability** - EZ-SRB convection shrink tunnels are proven performers even in the most demanding production environments
- **Size range flexibility** - Container or multipack diameters range up to 6" and heights up to 10". Larger sizes can be accommodated with customized tunnel infeed and discharge openings
- **Tool-less container changeovers** - Changeover process is simple, intuitive and repeatable
- **Stainless steel construction** - Durable, easy to clean, easy to maintain
- **Cantilevered floor stand mounting** - Tunnels can be installed over existing or new conveyor
- **Digital temperature controller** - Provides accurate control of tunnel temperatures
- **Double-wall tunnel shell** - Double wall design keeps external surface cooler
- **Heat source** - Electric tubular heaters producing radiant heat in a recirculating, forced air convection system



FULL BODY

FULL BODY OVER THE CAP

TAMPER EVIDENT

TAMPER EVIDENT

PARTIAL

MULTIPACK




# EZ-SRB CONVECTION HEAT SHRINK TUNNELS

## TYPICAL PRODUCT SPECIFICATIONS


	EZ-24-SRB	EZ-36-SRB	EZ-48-SRB	EZ-72-SRB
Type	Convection, recirculating forced air		Convection, recirculating forced air, dual zone	
Container or Multi-pack Sizes	Maximum 6" diameter, 10" tall			
Power	230 VAC, 3-phase, 30 amps 480 VAC, 3-phase, 17 amps		230 VAC, 3-phase, 60 amps 480 VAC, 3-phase, 34 amps	

## CONFIGURATION


EZ-24-SRB

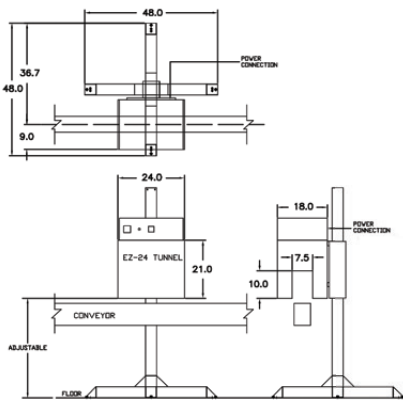


EZ-36-SRB

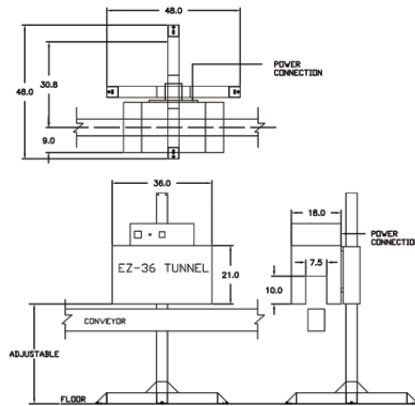

EZ-48-SRB

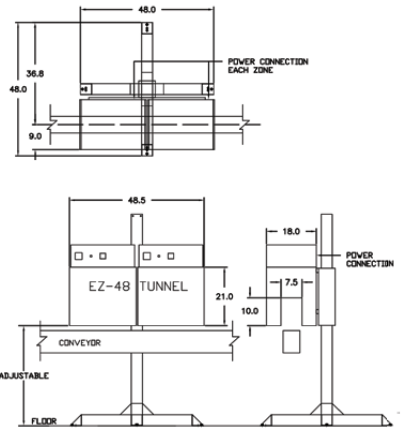

EZ-72-SRB

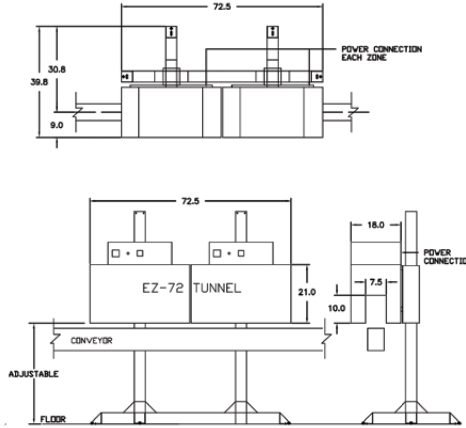

Dimensions are in inches

## OPTIONS

- **Air Flow Baffles** - Interchangeable air flow baffles enable tunnels to effectively handle multiple container sizes and geometries
- **Automatic Tunnel Lifter** - Automatically raises tunnel during conveyor stoppages to prevent product damage
- **Casters with Leveling Pads** - Enhance flexibility by making it easy to add or remove tunnels from a production line
- **Spare Parts Kit** - Recommended start-up parts inventory

## SHRINK APPLICATIONS



FULL BODY



FULL BODY OVER THE CAP



TAMPER EVIDENT



TAMPER EVIDENT



PARTIAL



MULTIPACK