## O/K PACKAGING SYSTEM

The OK Packaging System is a comprehensive product line of case erectors, pick & place systems, case sealers, conveyors, and other options. The machines have easy adjustments for quick size changes without tools, operator friendly controls and ergonomic loading of cases and tape.

Most machines are available in powder coated painted finish or in stainless steel. We provide equipment with an exceptional quality, with many standard features, offered at competitive prices.

# OK SUPERFORMER Case Erector



The new OK SUPERFORMER erects
RSC cases, folds the bottom flaps
and closes them with tape.
Unique features of the machine include
automatic case squaring system, easy
size change, tape and case monitoring.



# OK SUPERFORMER

## Case Erector

#### Features:

- · Quick and easy size change
- · Automatic case squaring system
- · Tape and case monitoring system
- · Single frame, in line design
- · Stainless steel exterior finish

#### Benefits:

- · Increased production efficiency and flexibility.
- · Consistency for automatic lines and enhances
- · Operator friendly and reliablility.
- · Easy of set up, training and operation.
- Clean and durable finish, preferred in food and other industries.

## Technical Specifications: Superformer-1M

Case ranges (L x B x H): min. 200 x 150 x 75 mm.

max. 450 x 350 x 400 mm.

200 x 200 x 150 mm. 600 x 500 x 600 mm. Superformer-2

Superformer-1

#### Superformer-2M

min. 200 x 150 x 75 mm. max. 400 x 350 x 400 mm. 200 x 200 x 150 mm.

600 x 500 x 500 mm.

Speed

SF-1M up to 15 cases/minute. SF-1 up to 13 cases/minute. SF-2M up to 24 cases/minute. SF-2 up to 20 cases/minute.

Taping head:

OK 55 high quality taping head with open tape feed path, suitable for 50 mm wide tape (max.) and 350 mm diameter rolls.

Case magazine: Electric:

Horizontal, belt driven, indexing magazine, length 1000 mm. 400V, 3Phase, 50Hz standard. Other voltages to requirement.

Pneumatic:


6 bar, 1/4" supply.

Controls:

PLC controls with operator fault finding display. Signals for low tape, no tape, tape not applied, low case magazine and

empty case magazine.

Finish: Machine handing: Powder coated steel (light and dark grey). Right to left of left to right requirement.

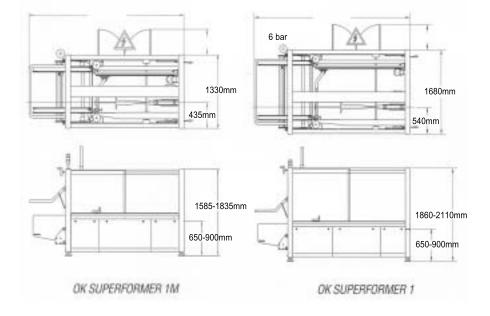

As result of technical updates and developments machines are subject to change without any notice, consequently no rights can be extracted to this document.

## O/K PACKAGING SYSTEM

## **OK SUPERFORMER Options:**

- Smaller case sizes.
- Partly or complete stainless steel.
- Case magazine 1500 mm long.

## **OK Product Packaging System**

- Case Erectors and Case Liners.
- Bag and Case Closing Machines.
- Conveyor Systems and Product Fillers.
- O/K International's equipment can be added to enhance existing lines or can be supplied as a complete automatic system.



### O/K Packaging Systems by

P.O. Box 118/Heereweg 441a 2160 AC Lisse/The Netherlands

Tel. +31 252.216250 Fax. +31 252.214252 sales@okpackaging.com www.okpackaging.com

### O/K International (Europe) Ltd.

O/K House

Shepherds Grove Ind. Estate (West) Stanton, Suffolk IP31 2AR/England

Tel. +44 1359.250705 Fax. +44 1359.250165 sales@okinteurope.co.uk www.okpackaging.com

## Worldwide Locations:

O/K International Corp. Marlborough, MA USA www.okcorp.com O/K Durable Packaging Chicago, IL USA www.okdurable.com