

# Model 336 Top Case Sealer


for top sealing with hot melt adhesive



Small in size, but a giant in production, the Model 336 is built strong and tough to tackle the most demanding case sealing challenges you face today. Whether linked to a drop packer or feeding cases from one or multiple lines, the 336 provides reliable, continuous operation. Send cases spaced or back to


back and the 336 folds flaps, seals and delivers cases that are square, sealed and secure. Today's production requirements demand more from your equipment. Rely on the brand that gives you more in quality, performance and reliability ...

A-B-C Packaging machines.




**A-B-C PACKAGING  
MACHINE CORPORATION**

# Model 336 Top Case Sealer

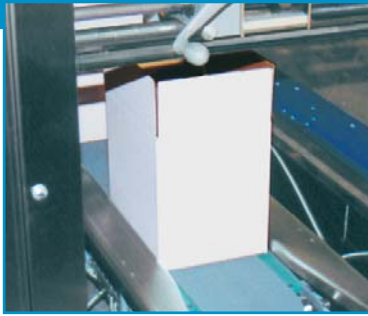


## Nonstop Case Feed

Nonstop case feed keeps your line moving at maximum speed- cases may feed to the sealer back to back or spaced, and the metering belt automatically spaces each case for synchronized flap folding.

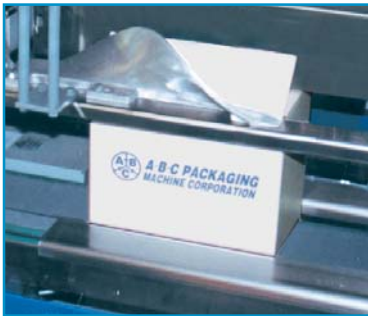

## Contoured Flap Folders Close Flaps Securely

Contoured flap folders, crafted from cast aluminum, close the outer case flaps smoothly as the case is conveyed through the sealer. This unique flap folder design is production proven to fold flaps gently at the scoreline. A steel tongue rides between the flaps as they are folded, preventing flap overlap, even when running cases with poor scores.

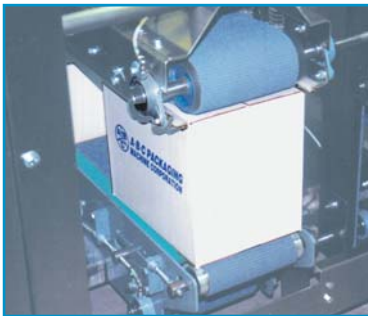

## Powered Compression Section Ensures Square Cases

Motorized top and bottom belts transfer the case into the compression section, eliminating the chance of "dogeared flaps." The upper compression belt is supported by spring-loaded rollers that accommodate variations in case height and ensure proper sealing of all cases.



## High Visibility Guards Provide Complete Access

A standard feature on the 336 are gull wing style guard doors that provide high visibility when closed, yet permit complete machine access when opened. They are electrically interlocked to stop the machine when opened.

All information in this brochure was current at time of printing, however, in the continuing effort to improve the quality and construction of A-B-C equipment, we reserve the right to make changes without notice.

- CONTINUOUS OPERATION
- COMPACT SIZE
- WIDE CASE RANGE
- LOW MAINTENANCE

### Quality features make a better machine:

- Stainless steel frame construction
- Pacer belt infeed automatically feeds cases spaced or back to back
- Contoured cast aluminum outer flap folders
- Powered compression section w/ upper and lower belt drive, spring loaded to compensate for case height variations
- Clear, high visibility guards - electrically interlocked to stop the machine when opened
- Adjustable leveling footpads
- Sealed bearings
- Quick changeover with rapid adjust hand cranks for new case sizes
- Custom built to your line elevation

### Specifications:

	Case range: RSC cases		
	L	W	H
Min	8"	6"	4"
Max	24"	17"	17"

Electrical: Primary 220 or 440v, 60hz, 3ph, NEMA 12

Air: .08 scfm per cycle at 60 psi


Self lubricated pneumatic tucker

Automatic water eliminator keeps air lines dry

Mechanical: 2 hp motor - Sealed bearings throughout

Speed: Up to 45 cases/minute

### Model 536 available for speeds to 100 cpm Tape sealing model also available

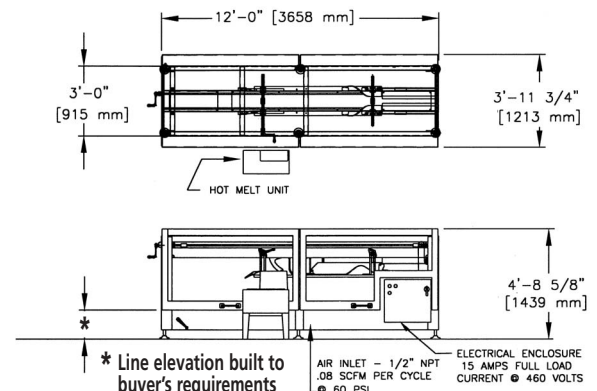

# A-B-C PACKAGING MACHINE CORPORATION

811 Live Oak St., Tarpon Springs, FL 34689-4199 USA • Ph 727-937-5144 • Fax 727-938-1239 • www.abcpackaging.com